


Rad-hard precision bipolar single operational amplifier

Features

- High radiation immunity: 300 kRad TID at high/low dose rate (ELDRS-free), tested immunity of SEL /SEU at 125° C under 120 MeV/mg/cm² LET ions, 14 V supply
- Rail-to-rail output
- 8 MHz gain bandwidth at 16 V
- Low input offset voltage: 100 μ V typ
- Supply current: 2.2 mA typ
- Operating from 3 to 16 V
- Input bias current: 30 nA typ
- ESD internal protection \geq 2 kV
- Latch-up immunity: 200 mA
- QML-V RHA, ELDRS-free qualified under smd 5962-06237

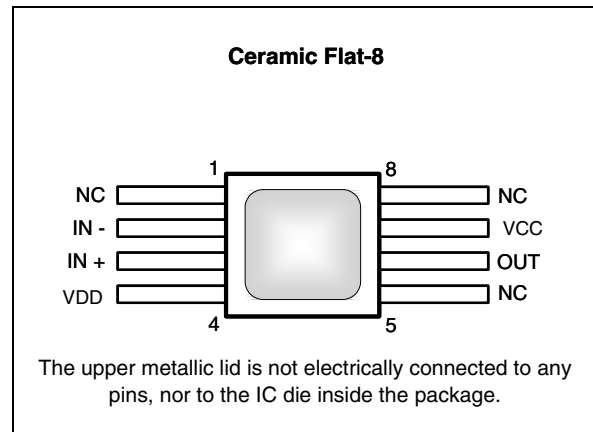

Applications

- Space probes and satellites
- Defense systems
- Scientific instrumentation
- Nuclear systems

Description

The RHF43B is a precision bipolar operational amplifier available in a ceramic 8-pin flat package and in die form. In addition to its low offset voltage, rail-to-rail feature and wide supply voltage, the RHF43B is designed for increased tolerance to radiation. Its intrinsic ELDRS-free rad-hard design allows this product to be used in space applications and in applications operating in harsh environments.

1 Absolute maximum ratings and operating conditions

Table 1. Absolute maximum ratings (AMR)

Symbol	Parameter	Value	Unit
V_{CC}	Supply voltage ⁽¹⁾	18 ±9	V
V_{id}	Differential input voltage ⁽²⁾	±1.2	V
V_{in}	Input voltage range ⁽³⁾	$V_{DD}-0.3$ to 16	V
I_{IN}	Input current	45	mA
T_{stg}	Storage temperature	-65 to +150	°C
R_{thja}	Thermal resistance junction to ambient ⁽⁴⁾⁽⁵⁾	125	°C/W
R_{thjc}	Thermal resistance junction to case ⁽⁴⁾⁽⁵⁾	40	°C/W
T_j	Maximum junction temperature	150	°C
ESD	HBM: human body model ⁽⁶⁾	2	kV
	Latch-up immunity	200	mA
	Lead temperature (soldering, 10 sec)	260	°C
Radiation related parameters			
Dose	Low dose rate of 0.01 rad.sec ⁻¹ (up to $V_{CC} = 16$ V)	300	kRad
	High dose rate of 50-300 rad.sec ⁻¹ (up to $V_{CC} = 16$ V)	300	kRad
HI	Heavy ion latch-up (SEL) immune with heavy ions (up to $V_{CC} = 14$ V)	120	MeV.cm ² /mg

1. All values, except differential voltage are with respect to network terminal.
2. Differential voltages are the non-inverting input terminal with respect to the inverting input terminal.
3. The magnitude of input and output terminal must never exceed $V_{CC} + 0.3$ V.
4. Short-circuits can cause excessive heating and destructive dissipation.
5. R_{th} are typical values.
6. Human body model: 100 pF discharged through a 1.5 kΩ resistor between two pins of the device, done for all couples of pin combinations with other pins floating.

Table 2. Operating conditions

Symbol	Parameter	Value	Unit
V_{CC}	Supply voltage	3 to 16	V
V_{icm}	Common mode input voltage range	V_{DD} to V_{CC}	V
T_{oper}	Operating free air temperature range	-55 to +125	°C

2 Electrical characteristics

Table 3. 16 V supply: $V_{CC} = +16\text{ V}$, $V_{DD} = 0\text{ V}$, load to $V_{CC}/2$
(unless otherwise specified)

Symbol	Parameter	Test conditions	Ambient temp.	Min.	Typ.	Max.	Unit
DC performance							
I_{CC}	Supply current	No load	+125°C			2.9	mA
			+25°C		2.5	2.9	
			-55°C			2.9	
V_{io}	Offset voltage	$V_{icm} = V_{CC}/2$	+125°C	-500		500	μV
			+25°C	-300	100	300	
			-55°C	-500		500	
DV_{io}	Input offset voltage drift		-		1		$\mu\text{V}/^\circ\text{C}$
I_{ib}	Input bias current	$V_{icm} = V_{CC}/2$	+125°C	-100		100	nA
			+25°C	-60	30	60	
			-55°C	-100		100	
DI_{ib}	Input offset current temperature drift	$V_{icm} = V_{CC}/2$	-		100		$\text{pA}/^\circ\text{C}$
I_{io}	Input offset current	$V_{icm} = V_{CC}/2$	+125°C	-35		35	nA
			+25°C	-15	1	15	
			-55°C	-35		35	
R_{in}	Differential input resistance between in+ and in-		+25°C		0.16		$\text{M}\Omega$
	Input resistance between in+ (or in-) and GND		+25°C		2000		
C_{in}	Differential input capacitance between in+ and in-		+25°C		8		pF
	Input capacitance between in+ (or in-) and GND		+25°C		2		
CMR	Common mode rejection ratio	$0 < V_{icm} < 16\text{ V}$	+125°C	72			dB
			+25°C	72	110		
			-55°C	72			
SVR	Supply rejection ratio	$3\text{ V} < V_{CC} < 16\text{ V}$ $V_{icm} = V_{CC}/2$	+125°C	80			dB
			+25°C	90	120		
			-55°C	80			
A_{VD}	Large signal voltage gain	$V_{out} = 0.5\text{ V to } 15.5\text{ V}$ $R_L = 1\text{ k}\Omega$ $0 < V_{icm} < 16\text{ V}$	+125°C	60			dB
			+25°C	74	85		
			-55°C	60			

Table 3. 16 V supply: $V_{CC} = +16\text{ V}$, $V_{DD} = 0\text{ V}$, load to $V_{CC}/2$ (unless otherwise specified) (continued)

Symbol	Parameter	Test conditions	Ambient temp.	Min.	Typ.	Max.	Unit
V _{OH}	High level output voltage	R _L = 1 kΩ	+125°C	15.6			V
			+25°C	15.7	15.8		
			-55°C	15.6			
		R _L = 10 kΩ	+125°C	15.8			
			+25°C	15.9	15.96		
			-55°C	15.8			
V _{OL}	Low level output voltage	R _L = 1 kΩ	+125°C			0.3	V
			+25°C		0.1	0.2	
			-55°C			0.3	
		R _L = 10 kΩ	+125°C			0.1	
			+25°C		0.04	0.06	
			-55°C			0.1	
I _{out}	Output sink current	V _{out} = V _{CC}	+125°C	15			mA
			+25°C	20	30		
			-55°C	15			
	Output source current	V _{out} = V _{CC}	+125°C	10			
			+25°C	15	25		
			-55°C	10			
AC performance							
GBP	Gain bandwidth product	F = 100 kHz R _L = 1 kΩ, C _L = 100 pF	+125°C	3.5			MHz
			+25°C	6	8		
			-55°C	3.5			
F _u	Unity gain frequency	R _L = 1 kΩ, C _L = 100 pF	+25°C		5		MHz
φ _m	Phase margin	Gain = +5 R _L = 1 kΩ, C _L = 100 pF	+25°C		50		Degrees
SR	Slew rate	R _L = 1 kΩ, C _L = 100 pF	+125°C	1.7			V/μs
			+25°C	2	3		
			-55°C	1.7			
e _n	Equivalent input noise voltage	F = 1 kHz	+25°C		7.5		$\frac{nV}{\sqrt{Hz}}$
i _n	Equivalent input noise current	F = 1 kHz	+25°C		1		$\frac{pA}{\sqrt{Hz}}$
THD+e _n	Total harmonic distortion	V _{out} = (V _{CC} -1 V)/5 Gain = -5.1 V _{icm} = V _{CC} /2	+25°C		0.01		%

Table 4. 3 V supply: $V_{CC} = +3\text{ V}$, $V_{DD} = 0$, load to $V_{CC}/2$ (unless otherwise specified)

Symbol	Parameter	Test conditions	Ambient temp.	Min.	Typ.	Max.	Unit
DC performance							
I_{CC}	Supply current	No load	+125°C			2.6	mA
			+25°C		2.2	2.6	
			-55°C			2.6	
V_{io}	Offset voltage		+125°C	-500		500	μV
			+25°C	-300	100	300	
			-55°C	-500		500	
DV_{io}	Input offset voltage drift		-		1		$\mu\text{V}/^\circ\text{C}$
I_{ib}	Input bias current	$V_{CC} = +4\text{ V}$ $V_{icm} = V_{CC}/2$	+125°C	-100		100	nA
			+25°C	-60	30	60	
			-55°C	-100		100	
DI_{ib}	Input offset current temperature drift	$V_{CC} = +4\text{ V}$ $V_{icm} = V_{CC}/2$	-		100		$\text{pA}/^\circ\text{C}$
I_{io}	Input offset current	$V_{CC} = +4\text{ V}$ $V_{icm} = V_{CC}/2$	+125°C	-35		35	nA
			+25°C	-15	1	15	
			-55°C	-35		35	
R_{in}	Differential input resistance between in+ and in-		+25°C		0.16		$\text{M}\Omega$
	Input resistance between in+ (or in-) and GND		+25°C		2000		
C_{in}	Differential input capacitance between in+ and in-		+25°C		8		pF
	Input capacitance between in+ (or in-) and GND		+25°C		2		
CMR	Common mode rejection ratio	$0 < V_{icm} < 3\text{ V}$	+125°C	72			dB
			+25°C	72	90		
			-55°C	72			
A_{VD}	Large signal voltage gain	$V_{out} = 0.5\text{ V to } 2.5\text{ V}$ $R_L = 1\text{ k}\Omega$ $0 < V_{icm} < 3\text{ V}$	+125°C	60			dB
			+25°C	74	85		
			-55°C	60			

**Table 4. 3 V supply: $V_{CC} = +3\text{ V}$, $V_{DD} = 0$, load to $V_{CC}/2$
(unless otherwise specified) (continued)**

Symbol	Parameter	Test conditions	Ambient temp.	Min.	Typ.	Max.	Unit
V _{OH}	High level output voltage	R _L = 1 kΩ	+125°C	2.8			V
			+25°C	2.9	2.95		
			-55°C	2.8			
		R _L = 10 kΩ	+125°C	2.9			
			+25°C	2.94	2.98		
			-55°C	2.9			
V _{OL}	Low level output voltage	R _L = 1 kΩ	+125°C			0.2	V
			+25°C		0.05	0.1	
			-55°C			0.2	
		R _L = 10 kΩ	+125°C			0.1	
			+25°C		0.02	0.06	
			-55°C			0.1	
I _{out}	Output sink current	V _{out} = V _{CC}	+125°C	15			mA
			+25°C	20	30		
			-55°C	15			
	Output source current	V _{out} = V _{CC}	+125°C	10			
			+25°C	15	25		
			-55°C	10			
AC performance							
GBP	Gain bandwidth product	F = 100 kHz R _L = 1 kΩ, C _L = 100 pF	+125°C	3.5			MHz
			+25°C	6	7.5		
			-55°C	3.5			
F _u	Unity gain frequency	R _L = 1 kΩ, C _L = 100 pF	+25°C		5		MHz
φ _m	Phase margin	Gain = +5 R _L = 1 kΩ, C _L = 100 pF	+25°C		50		Degrees
SR	Slew rate	R _L = 1 kΩ, C _L = 100 pF	+125°C	1.7			V/μs
			+25°C	2	2.7		
			-55°C	1.7			
e _n	Equivalent input noise voltage	F = 1 kHz	+25°C		7		$\frac{nV}{\sqrt{Hz}}$
i _n	Equivalent input noise current	F = 1 kHz	+25°C		0.8		$\frac{pA}{\sqrt{Hz}}$
THD+e _n	Total harmonic distortion	V _{out} = (V _{CC} -1 V)/5 Gain = -5.1 V _{icm} = V _{CC} /2	+25°C		0.01		%

Figure 1. Input offset voltage distribution

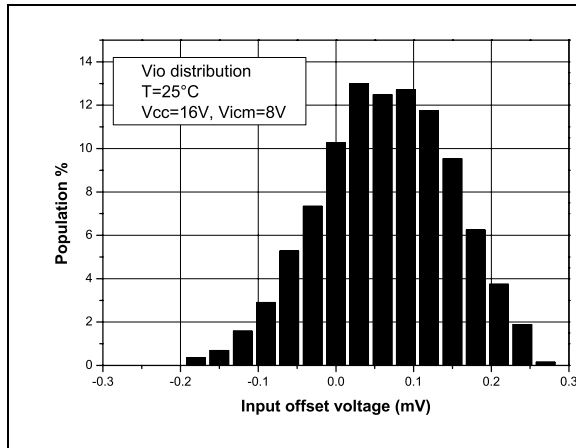


Figure 2. Input bias current vs. supply voltage

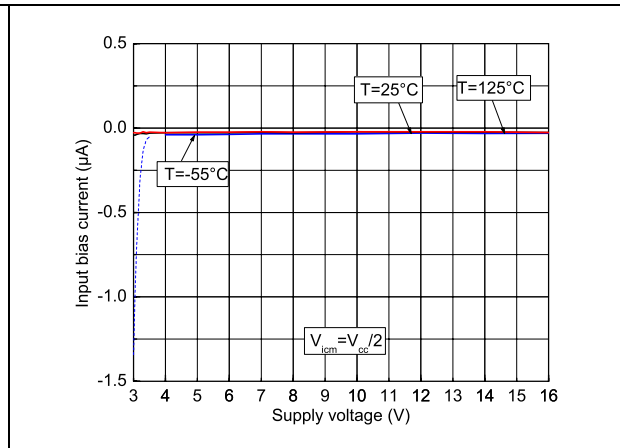
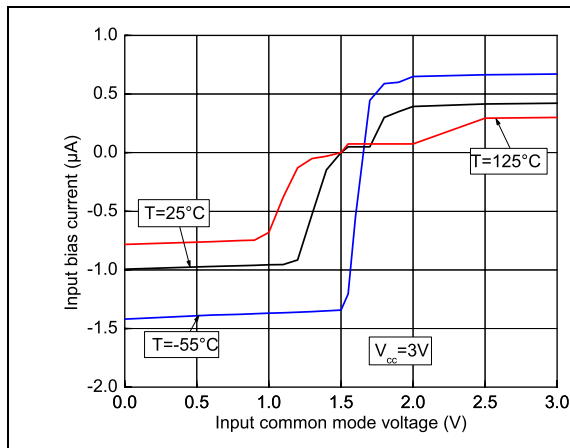
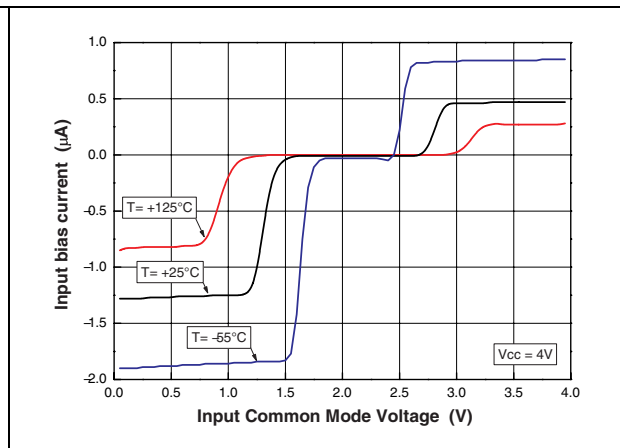
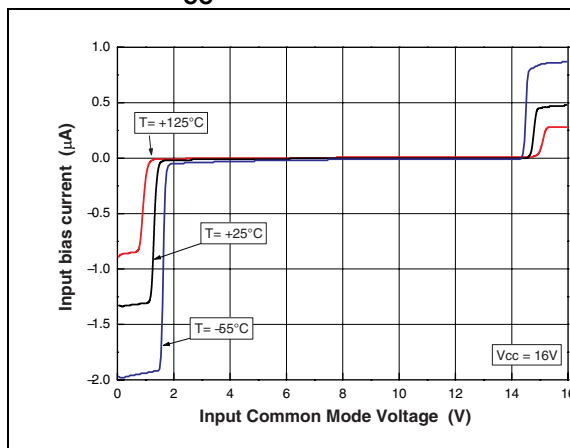
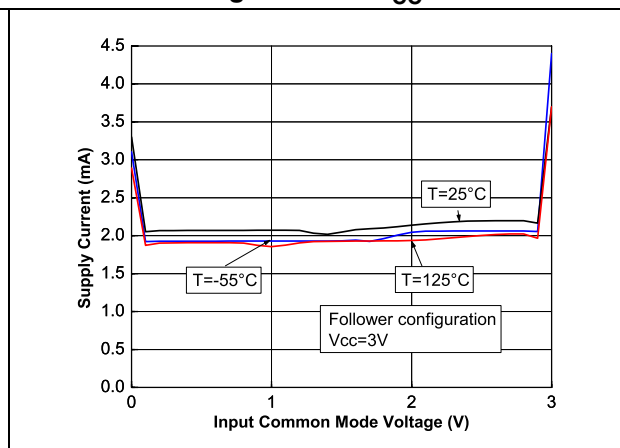
Figure 3. Input bias current vs. V_{icm} at $V_{cc} = 3\text{V}$ Figure 4. Input bias current vs. V_{icm} at $V_{cc} = 4\text{V}$ Figure 5. Input bias current vs. V_{icm} at $V_{cc} = 16\text{V}$ Figure 6. Supply current vs. V_{icm} in follower configuration at $V_{cc} = 3\text{V}$ 

Figure 7. Supply current vs. V_{icm} in follower configuration at $V_{CC} = 16\text{ V}$

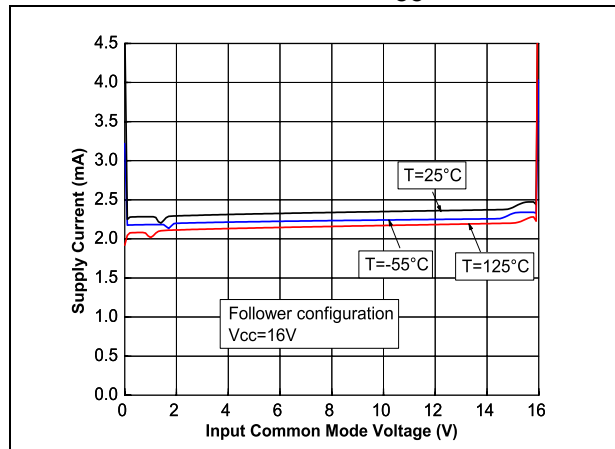


Figure 8. Supply current vs. supply voltage at $V_{icm} = V_{CC}/2$

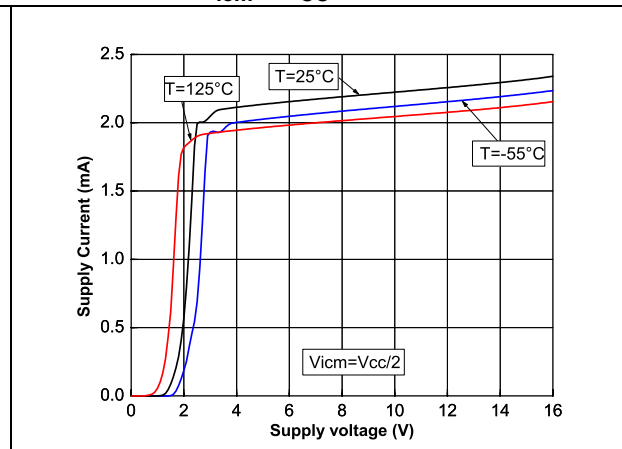


Figure 9. Output current vs. supply voltage at $V_{icm} = V_{CC}/2$

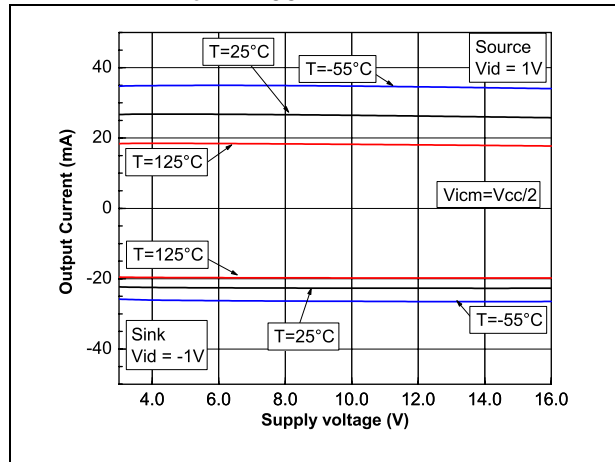


Figure 10. Output current vs. output voltage at $V_{CC} = 3\text{ V}$

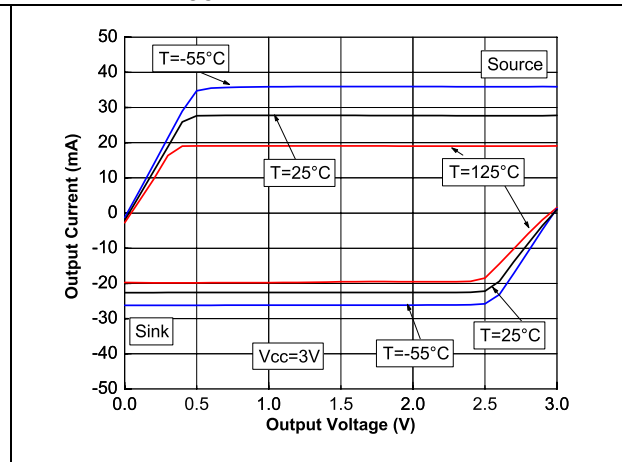


Figure 11. Output current vs. output voltage at $V_{CC} = 16\text{ V}$

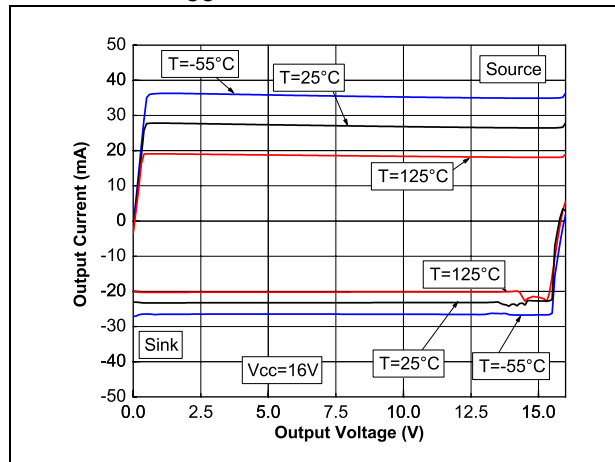


Figure 12. Differential input voltage vs. output voltage at $V_{CC} = 3\text{ V}$

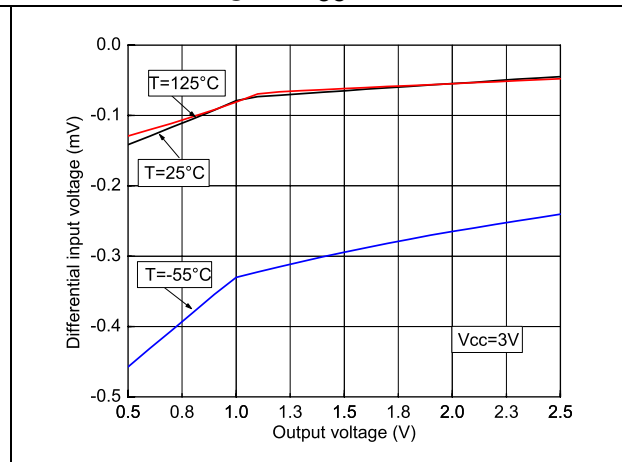


Figure 13. Differential input voltage vs. output voltage at $V_{CC} = 16\text{ V}$

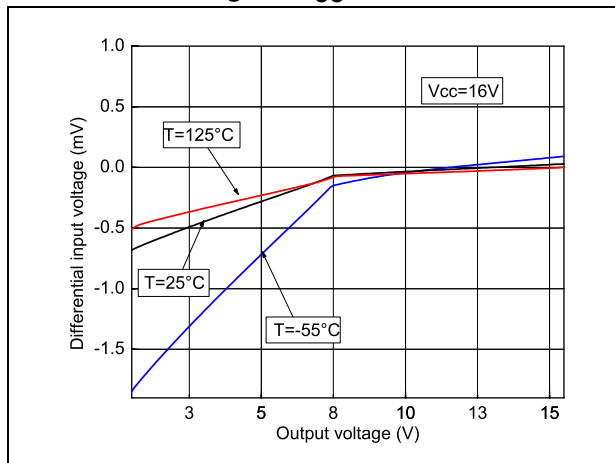


Figure 14. Noise vs. frequency at $V_{CC} = 3\text{ V}$ and $V_{CC} = 16\text{ V}$

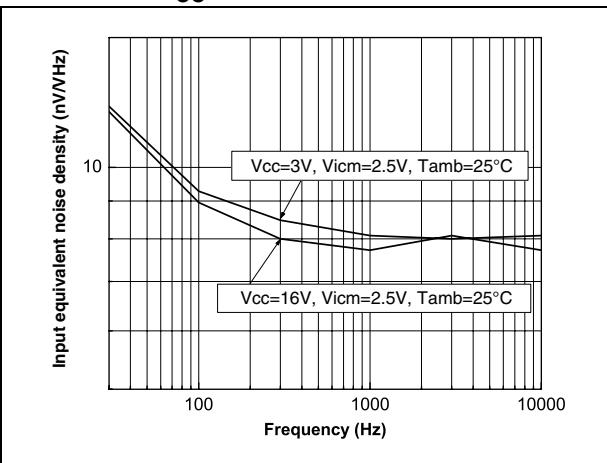


Figure 15. Voltage gain and phase vs. frequency at $V_{icm} = 1.5\text{ V}$

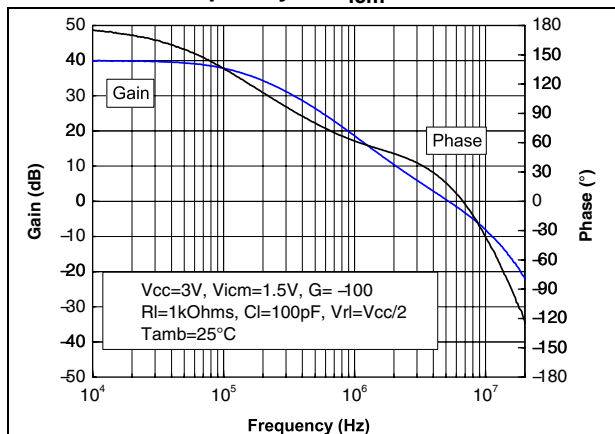


Figure 16. Voltage gain and phase vs. frequency at $V_{icm} = 2.5\text{ V}$

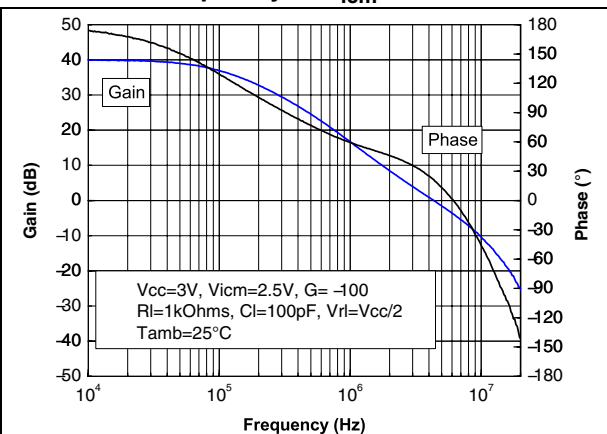


Figure 17. Voltage gain and phase vs. frequency at $V_{icm} = 0.5\text{ V}$

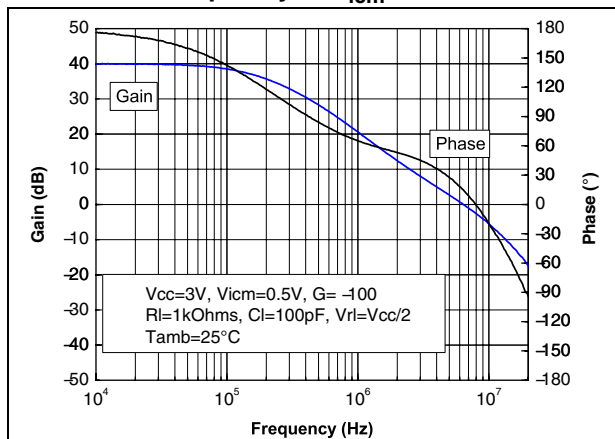


Figure 18. Voltage gain and phase vs. frequency at $V_{icm} = 8\text{ V}$

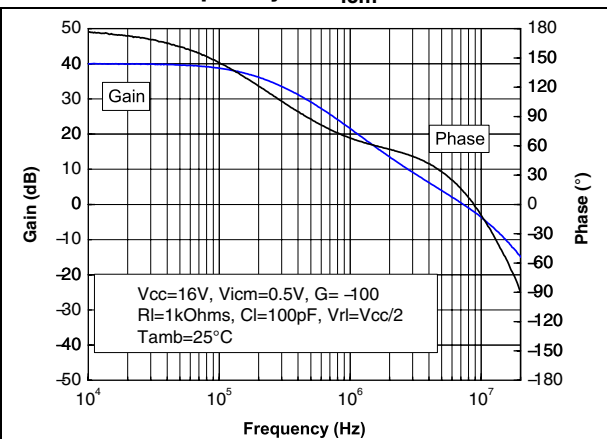


Figure 19. Voltage gain and phase vs. frequency at $V_{icm} = 15.5\text{ V}$

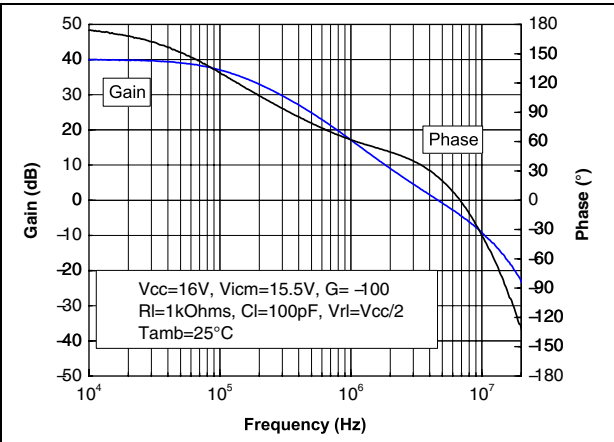


Figure 20. Voltage gain and phase vs. frequency at $V_{icm} = 0.5\text{ V}$

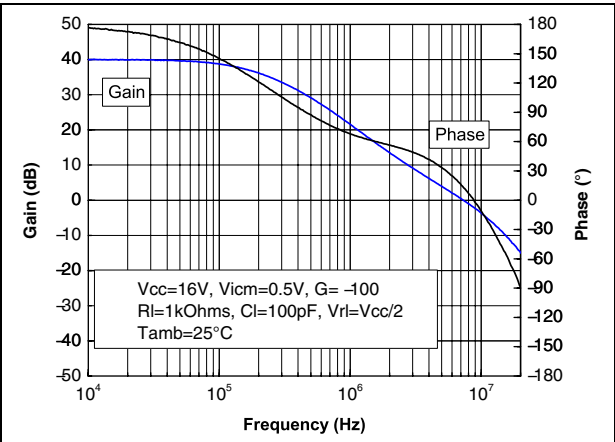


Figure 21. Inverting large signal pulse response at $V_{CC} = 3\text{ V}$, $+25^\circ\text{C}$


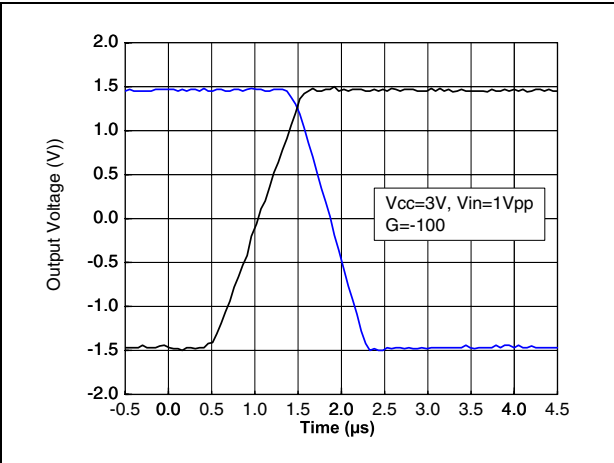


Figure 22. Inverting Large signal pulse response at $V_{CC} = 16\text{ V}$, $+25^\circ\text{C}$

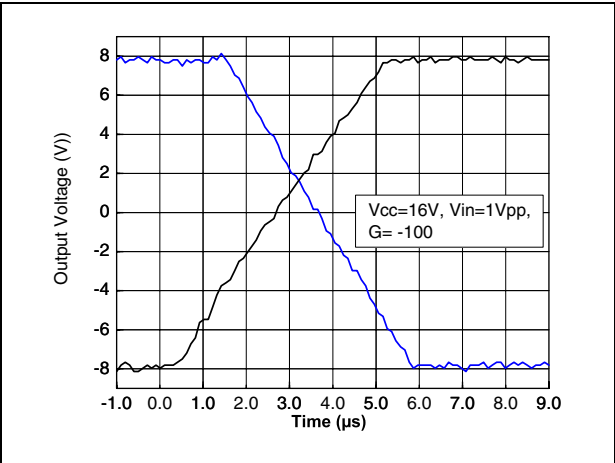

3 Achieving good stability at low gains

At low frequencies, the RHF43B can be used in a low gain configuration as shown in [Figure 23](#). At lower frequencies, the stability is not affected by the value of the gain, which can be set close to 1 V/V (0 dB), and is reduced to its simplest expression $G1=1+Rfb/Rg$. Therefore, an R-C cell is added in the gain network so that the gain is increased (up to 5) at higher frequencies (where the stability of the amplifier could be affected). At higher frequencies, the gain becomes $G2=1+Rfb/(Rg//R)$.

Figure 23. Low gain configuration


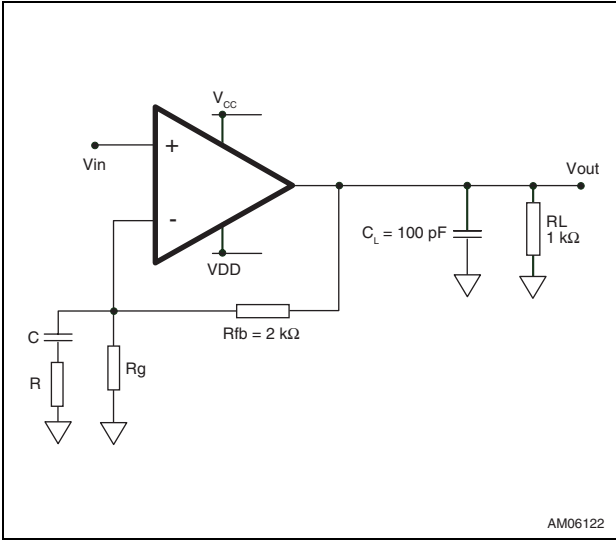


Figure 24. Closed-loop gain

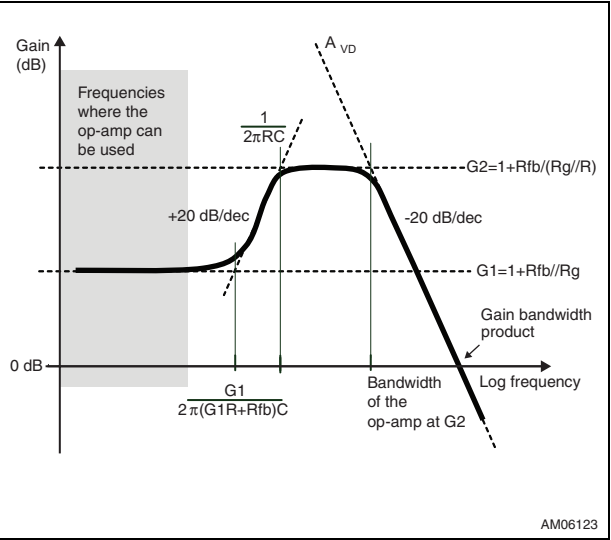

Rg becomes a complex impedance. The closed-loop gain features a variation in frequency and can be expressed as:

$$\text{Gain} = G1 \frac{1 + jC\omega \times \left(\frac{G1R + Rfb}{G1} \right)}{1 + jCR\omega}$$

where a pole appears at $1/2\pi RC$ and a zero at $G1/2\pi(G1R+Rfb)C$. The frequency can be plotted as shown in [Figure 24](#).

Table 5. External components versus low-frequency gain


G1 (V/V)	R (Ω)	C (nF)	Rg (Ω)	Rfb (Ω)
1.1	510	1	20k	2k
2	510	1	2k	2k
3	510	1	1k	2k
4	510	1	750	2.4k
5	Not connected	Not connected	820	3.3k

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

4.1 Ceramic Flat-8 package information

Figure 25. Ceramic Flat-8 package mechanical drawing

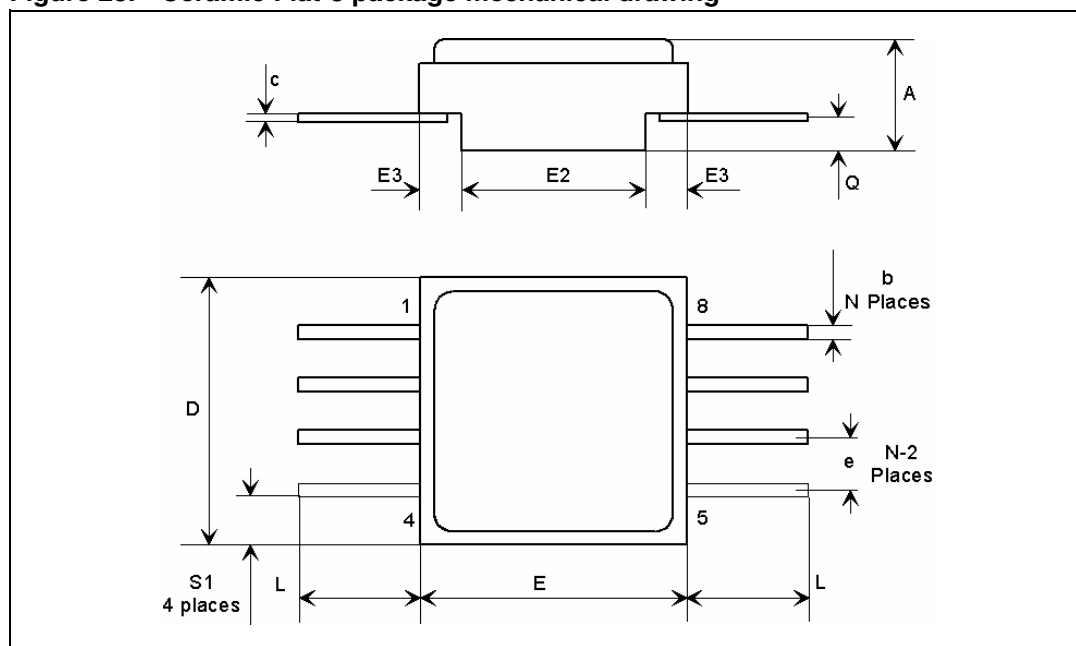

Note: The upper metallic lid is not electrically connected to any pins, nor to the IC die inside the package. Connecting unused pins or metal lid to ground or to the power supply will not affect the electrical characteristics.

Table 6. Ceramic Flat-8 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.24	2.44	2.64	0.088	0.096	0.104
b	0.38	0.43	0.48	0.015	0.017	0.019
c	0.10	0.13	0.16	0.004	0.005	0.006
D	6.35	6.48	6.61	0.250	0.255	0.260
E	6.35	6.48	6.61	0.250	0.255	0.260
E2	4.32	4.45	4.58	0.170	0.175	0.180
E3	0.88	1.01	1.14	0.035	0.040	0.045
e		1.27			0.050	
L	6.51		7.38	0.256		0.291
Q	0.66	0.79	0.92	0.026	0.031	0.092
S1	0.92	1.12	1.32	0.036	0.044	0.052
N	08			08		

5 Ordering information

Table 7. Order codes

Order code	SMD pin	Quality level	Package	Lead finish	Packing	Marking	EPPL
RHF43BK1	-	Engineering model	Flat-8	Gold	Strip pack	RHF43BK1	-
RHF43BK-01V	5962F062370 1VXC	QMLV-Flight	Flat-8	Gold	Strip pack	5962F06237 01VXC	Y
RHF43BDIE2V	5962F062370 1V9A	QMLV-Flight	Die	-	Strip pack	-	-

Note: Contact your ST sales office for information regarding the specific conditions for products in die form and QML-Q versions.

6 Revision history

Table 8. Document revision history

Date	Revision	Changes
21-May-2007	1	First public release.
10-Dec-2007	2	Changed name of pins on pinout diagram on cover page. Modified supply current values over temperature range in electrical characteristics. Power dissipation removed from AMR table.
29-Jan-2008	3	Added ELRS-free rad-hard design in description on cover page. Modified description of heavy ion latch-up (SEL) immunity parameter in Table 1 on page 2 .
11-May-2009	4	Updated radiation immunity in Features on page 1 and in Table 1 on page 2 . Updated smb reference in Features on page 1 .
15-Oct-2009	5	Updated test conditions for Avd vs. Vicm in Table 3 on page 3 and Table 4 on page 5 . Updated input current and voltage noise in Table 3 . Updated order codes in Table 7 on page 14 .
30-Mar-2010	6	Added Figure 4 and Figure 5 . Added information for ambient temperature in Table 3 and Table 4 . Added Chapter 3 .
20-Aug-2010	7	Corrected "L" dimension in Table 6 .
27-Jul-2011	8	Added Note: on page 13 and in the "Pin connections" diagram on the coverpage.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2011 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com